




FOUNDATION SERIES GUIDE

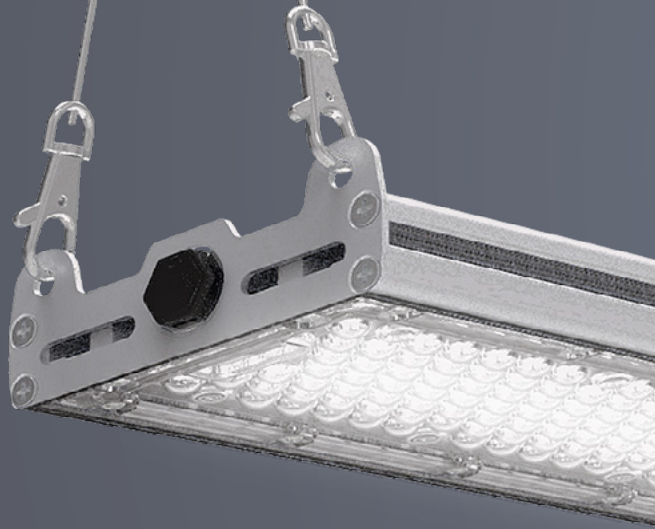

LED PANELS

● PRIME	04
● SELECT	06


CEILING BUTTON

● SOL	08
-------	----

BATTENS & WEATHERPROOF

● EZYFIX	10
● BOXY	12
● GRADUATE	14
● TYPHOON	16
● TRIDENT	18

CONTENTS

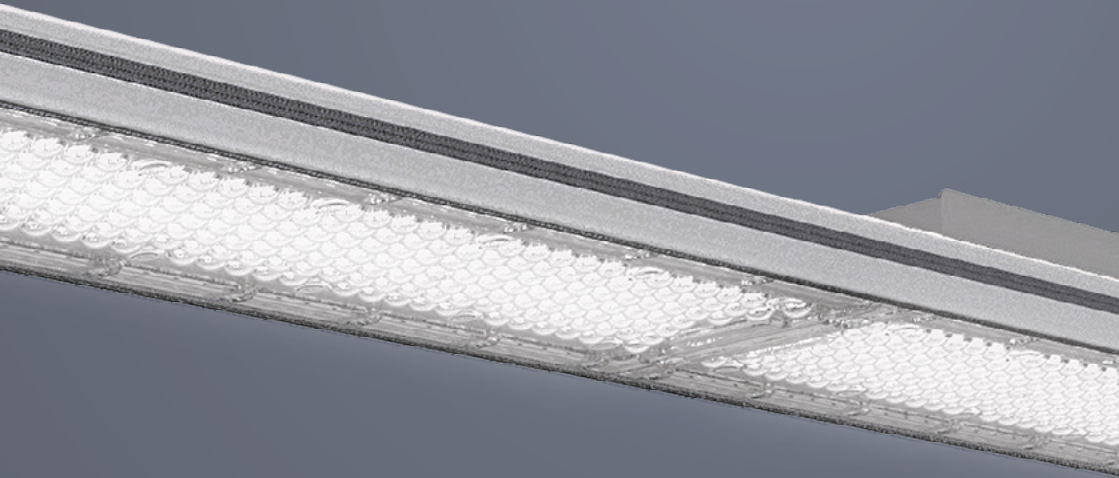

HIGHBAYS

● ASTRO	20
● SLATE	22

FLOODLIGHT

● CADET	24
---------	----

EXTERIOR WALL LIGHTS

● WALL PACK	26
● GUARD	28



PRIME

PANEL



**DIMMING
OPTIONS**



SDCM <3



**FLICKER
FREE**



**>72,000hrs
LIFETIME**

IC-F RATED

IC-F
ABUTTED &
COVERED



**5 YEAR
WARRANTY**



UGR <19



120LM/W

LIFETIME @L70 B10 >72,000hrs

LUMINAIRE EFFICACY 120lm/W

CCT 4000K

CRI >80

SDCM <3

UGR <19

BEAM ANGLE 90°

MAINS VOLTAGE AC200-240V/50-60Hz

POWER FACTOR >0.95

THD <20%

FLICKER Flicker free (PstLM <1/SVM <0.4)

CONNECTION 1.2m flex and plug

IP RATING IP40

IK RATING IK04

PRODUCT VARIANTS

WATTAGES

42W

LUMEN OUTPUT

5,000lm

DIMENSIONS

1195mm x 595mm x 34mm

PRIME1260-42-8345

WATTAGES

30W

LUMEN OUTPUT

3,600lm

DIMENSIONS

1195mm x 295mm x 28mm

PRIME1230-30-8345

WATTAGES

30W

LUMEN OUTPUT

3,600lm

DIMENSIONS

595mm x 595mm x 28mm

PRIME6060-30-8345

CONFIGURATIONS

TYPE

DALI-2

pushDim

Casambi Wireless

Emergency

SUFFIX CODE

-DA

-SD

-CA

-EM



SELECT

PANEL



UGR <19



120LM/W



**5 YEAR
WARRANTY**

IC-F RATED



**>72,000hrs
LIFETIME**



WATTAGE
Selectable



SDCM <3



CCT
Selectable



**FLICKER
FREE**

LIFETIME @L70 B10 >72,000hrs

LUMINAIRE EFFICACY 120lm/W

CCT (SELECTABLE) 3000K/4000K/5000K

CRI >80

SDCM <3

UGR <19

BEAM ANGLE 90°

MAINS VOLTAGE AC200-240V/50-60Hz

POWER FACTOR >0.90

DRIVER EFFICIENCY >92%

THD <15%

FLICKER Flicker free (PstLM <1/SVM <0.4)

CONNECTION 1.2m flex and plug

IP RATING IP40

IK RATING IK04

PRODUCT VARIANTS

*Lumen output at 4000K CCT

WATTAGES

LUMEN OUTPUT*

30W	3,600lm
38W	4,560lm
42W (Set)	5,000lm
50W	6,000lm

DIMENSIONS

1195mm x 595mm x 34mm

SELECT1260-50-8345

WATTAGES

LUMEN OUTPUT*

24W	2,880lm
26W	3,120lm
28W	3,360lm
30W (Set)	3,600lm

DIMENSIONS

1195mm x 295mm x 28mm

SELECT1230-30-8345

WATTAGES

LUMEN OUTPUT*

24W	2,880lm
26W	3,120lm
28W	3,360lm
30W (Set)	3,600lm

DIMENSIONS

595mm x 595mm x 28mm

SELECT6060-30-8345



SOL

CEILING BUTTON



**5 YEAR
WARRANTY**

**BLACK RING
ACCESSORY**



**>50,000hrs
LIFETIME**



IP54



CCT
Selectable



WATTAGE
Selectable

**MOTION
SENSOR**

Option



Up to
**2,000LM
OUTPUT**



100LM/W

LIFETIME @L70 B10 >50,000hrs

LUMINAIRE EFFICACY 100lm/W

CCT (SELECTABLE) 3000K/4000K

CRI >80

SDCM <5

BEAM ANGLE 132°

MAINS VOLTAGE AC220-240V/50-60Hz

POWER FACTOR >0.90

THD <20%

IP RATING IP65

IK RATING IK10

PRODUCT VARIANTS

*Lumen output at 4000K CCT

WATTAGES

LUMEN OUTPUT*

10W 1,000lm

20W 2,000lm

TYPE Standard

DIMENSIONS Ø290 x 58mm

SOL290-20-834

WATTAGES

LUMEN OUTPUT*

10W 1,000lm

20W 2,000lm

TYPE Includes microwave sensor

DIMENSIONS Ø290 x 58mm


SOL290-20-834-SNR

ACCESSORIES

BLACK RING
SOL290-BR-B



INTERNAL VIEW





EZYFIX

BATTEN



>50,000hrs
Lifetime



5 YEAR
WARRANTY



Up to
8,000LM
OUTPUT



WATTAGE
Selectable



FLICKER
FREE



TRIDONIC
DRIVER



160LM/W



CCT
Selectable



EMERGENCY
OPTION

LIFETIME @L70 B10 >50,000hrs	DRIVER BRAND Tridonic
LUMINAIRE EFFICACY 160lm/W	MAINS VOLTAGE AC220-240V/50-60Hz
CCT (SELECTABLE) 3000K/4000K/5000K	POWER FACTOR >0.95
CRI >80	THD <10%
SDCM <4	FLICKER Flicker free (PstLM <1/SVM <0.4)
BEAM ANGLE 120°	IP RATING IP20
	IK RATING IK08


PRODUCT VARIANTS

*Lumen output at 4000K CCT

WATTAGES	LUMEN OUTPUT*	WATTAGES	LUMEN OUTPUT*
28W	4,480lm	22W	3,520lm
35W	5,600lm	28W	4,480lm
42W (Set)	6,720lm	34W (Set)	5,480lm
50W	8,000lm	40W	6,400lm
DIMENSIONS	1503mm x 66mm x 64mm	DIMENSIONS	1203mm x 66mm x 64mm
EZY1500-50-8346		EZY1200-40-8346	

CONFIGURATIONS

TYPE	SUFFIX CODE
DALI-2	-DA
SwitchDim	-SD
Casambi Wireless	-CA
Emergency	-EM

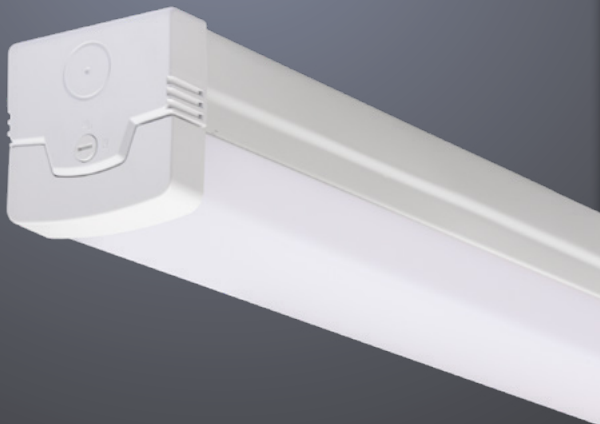

BOXY

BATTEN



**FLICKER
FREE**



**EASY LOCK
SYSTEM**



**>50,000hrs
LIFETIME**



**5 YEAR
WARRANTY**



Up to
**7,000LM
OUTPUT**



140LM/W



**CCT
SELECTABLE**

LIFETIME @L70 B10 >50,000hrs

LUMINAIRE EFFICACY 140lm/W

CCT (SELECTABLE) 4000K/5000K/6000K

CRI >80

SDCM <4

BEAM ANGLE 120°

DRIVER BRAND Lifud

MAINS VOLTAGE AC200-240V/50-60Hz

POWER FACTOR >0.95

THD <10%

FLICKER Flicker free (PstLM <1/SVM <0.4)

IP RATING IP20

IK RATING IK08

PRODUCT VARIANTS

*Lumen output at 4000K CCT

WATTAGES

LUMEN OUTPUT*

50W

7,000lm

DIMENSIONS

1503mm x 66mm x 64mm

BOXY1500-50-8456

WATTAGES

LUMEN OUTPUT*


40W

5,600lm

DIMENSIONS

1203mm x 66mm x 64mm

BOXY1200-40-8456

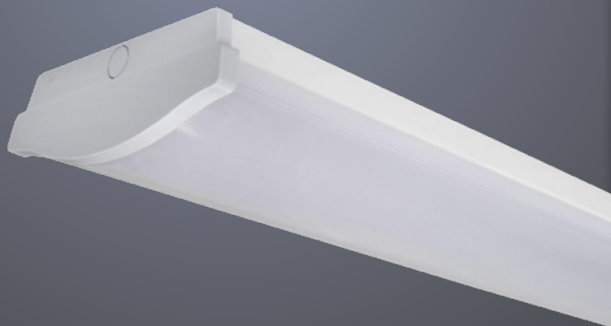

GRADUATE

WIDE BATTEN



**TRIDONIC
DRIVER**



110LM/W



Up to
**8,800LM
OUTPUT**



WATTAGE
Selectable



**EMERGENCY
OPTION**



**FLICKER
FREE**



>60,000hrs
Lifetime



**5 YEAR
WARRANTY**

LIFETIME @L70 B10 >50,000hrs

LUMINAIRE EFFICACY 110lm/W

CCT 4000K

CRI >80

SDCM <3

UGR 22

BEAM ANGLE 120°

DRIVER BRAND Tridonic

MAINS VOLTAGE AC220-240V/50-60Hz

POWER FACTOR >0.95

THD <10%

FLICKER Flicker free (PstLM <1/SVM <0.4)

IP RATING IP20

IK RATING IK06

PRODUCT VARIANTS

WATTAGES

LUMEN OUTPUT

40W	4,400lm
48W (Set)	5,280lm
51W	5,610lm
60W	6,600lm

DIMENSIONS

1161mm x 212mm x 72mm

GRAD4FT-40-840

WATTAGES

LUMEN OUTPUT

60W (Set)	6,600lm
68W	7,480lm
74W	8,140lm
80W	8,800lm

DIMENSIONS

1490mm x 212mm x 72mm

GRAD5FT-60-840

CONFIGURATIONS

TYPE

SUFFIX CODE

DALI-2/ SwitchDim	-DIM
Emergency	-EM



TYPHOON

IP66 BATTEN



WATTAGE

Selectable



Up to
**8,000LM
OUTPUT**

PRE-THREADED CABLE ENTRY



TRIDONIC DRIVER



140LM/W



FLICKER FREE



CCT

Selectable



EMERGENCY OPTION



>50,000hrs

Lifetime



**5 YEAR
WARRANTY**

LIFETIME @L70 B10 >50,000hrs

LUMINAIRE EFFICACY 140lm/W

CCT (SELECTABLE) 3000K/4000K/5000K

CRI >80

SDCM <4

BEAM ANGLE 120°

DRIVER BRAND Tridonic

MAINS VOLTAGE AC220-240V/50-60Hz

POWER FACTOR >0.95

THD <10%

FLICKER Flicker free (PstLM <1/SVM <0.4)

IP RATING IP20

IK RATING IK08

PRODUCT VARIANTS

*Lumen output at 4000K CCT

WATTAGES

LUMEN OUTPUT*

32W	4,632lm
39W	5,598lm
47W (Set)	6,652lm
56W	8,000lm

DIMENSIONS

1540mm x 100mm x 84mm

TYP1500-56-8346

WATTAGES

LUMEN OUTPUT*

22W	3,034lm
28W	4,090lm
34W (Set)	4,590lm
40W	5,659lm

DIMENSIONS

1240mm x 100mm x 84mm

TYP1200-40-8346

WATTAGES

LUMEN OUTPUT*

11W	1,439lm
14W	1,949lm
16W (Set)	2,328lm
20W	2,800lm

DIMENSIONS

640mm x 100mm x 84mm


TYP600-20-8346

CONFIGURATIONS

TYPE

SUFFIX CODE

DALI-2	-DA
SwitchDim	-SD
Casambi Wireless	-CA
Emergency	-EM

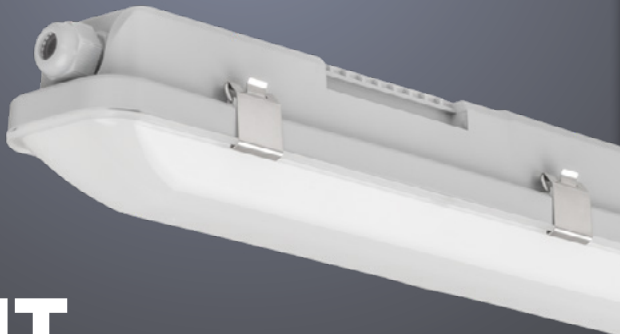

TRIDENT

IP66 BATTEN



**FLICKER
FREE**



130LM/W



>50,000hrs
Lifetime



**5 YEAR
WARRANTY**

**PRE-THREADED
CABLE ENTRY**



Up to
**6,500LM
OUTPUT**

LIFETIME @L70 B10 >50,000hrs

LUMINAIRE EFFICACY 130lm/W

CCT 4000K

CRI >80

SDCM <4

BEAM ANGLE 127°

MAINS VOLTAGE AC220-240V/50-60Hz

POWER FACTOR >0.95

THD <10%

FLICKER Flicker free (PstLM <1/SVM <0.4)

IP RATING IP20

IK RATING IK08

PRODUCT VARIANTS

WATTAGES

50W

LUMEN OUTPUT

6,500lm

DIMENSIONS

1465mm x 75mm x 80.6mm

TRI1500-50-840



ASTRO

HIGHBAY



>60,000hrs
Lifetime



5 YEAR
WARRANTY



IP65



WATTAGE
Selectable



MOTION
SENSOR
Option



1-10V
DIMMING



150LM/W



Up to
30,000LM
OUTPUT



CCT
Selectable



EMERGENCY
OPTION

LIFETIME @L70 B10 >60,000hrs

LUMINAIRE EFFICACY 150lm/W

CCT (SELECTABLE) 4000K/5000K/6000K

CRI >80

SDCM <5

BEAM ANGLE 90°

POWER OPTIONS 100W/150W/200W

MAINS VOLTAGE AC198-264V/50-60Hz

POWER FACTOR >0.95

THD <10%

IP RATING IP65

IK RATING IK08

CONNECTION 3m 3-core cable with 3-pin plug

PRODUCT VARIANTS

WATTAGES

100W

150W

200W (Set)

LUMEN OUTPUT*

15,000lm

22,500lm

30,000lm

DIMENSIONS

Ø320mm x 113mm

ASTRO-200-8456-90

CONFIGURATIONS

TYPE

DALI-2

Motion Sensor (Microwave)

Emergency

SUFFIX CODE

-DA

-MS

-EM

*Lumen output at 4000K CCT




SLATE

LINEAR HIGHBAY

ONE FOR ONE

T5 highbay replacement



54% ENERGY SAVINGS

Over T5 highbay equivalent



5 YEAR

Warranty




Output up to

26,000LM

OPTICS

For warehouse aisles
and open areas

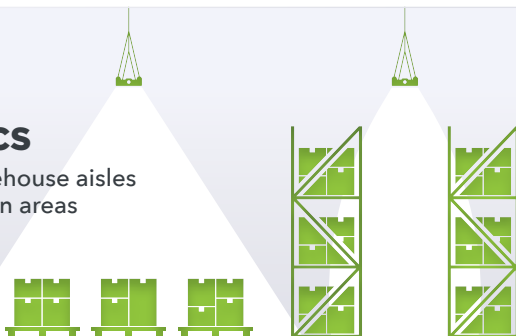

WATTAGE

Selectable
65W–150W



180LM/W



SENSOR

And control options



>60,000hrs

Lifetime



UGR 25

LIFETIME @L70 B10 >60,000hrs

LUMINAIRE EFFICACY 180lm/W

CCT 4000K

CRI <70

UGR <25

SUSPENSION KIT

3m adjustable 304 stainless steel

DIMMING 1-10V

MAINS VOLTAGE 200-277VAC / 50-60 Hz

POWER FACTOR 0.99

DRIVER EFFICIENCY 95%

THD 5%

SURGE PROTECTION L-N:2KV,L-FG/N-FG:2KV

FLICKER Flicker free (Pst LM <1, SVM <0.4)

CONNECTION 3m Flex and plug

IP RATING IP66

IK RATING IK08

PRODUCT VARIANTS

WATTAGES

LUMEN OUTPUT

65W	11,700lm
80W	14,400lm
100W	18,000lm
120W	21,800lm
150W	26,000lm

DIMENSIONS 1000mm x 110mm x 60mm

BEAM ANGLE 90° (Open Area)

SLATE-150-840-G-90

WATTAGES

LUMEN OUTPUT

65W	11,700lm
80W	14,400lm
100W	18,000lm
120W	21,800lm
150W	26,000lm

DIMENSIONS 1000mm x 110mm x 60mm

BEAM ANGLE 30x100° (Aisle)

SLATE-150-840-G-AD

CONFIGURATIONS

TYPE

SUFFIX CODE

DALI-2	-DA
pushDim	-SD
Casambi Wireless	-CA

TYPE

SUFFIX CODE

Motion Sensor	-SNR
Daylight Sensor	-DS



CADET

FLOODLIGHT



**5 YEAR
WARRANTY**



CCT
Selectable



180LM/W



**MOUNTING
ACCESSORIES**

Available



>102,000hrs
Lifetime



1000hrs
Salt spray
resistance



WATTAGE
Selectable



Up to
**38,000LM
OUTPUT**

**ASYMMETRIC
DISTRIBUTION**





50 — 200W
4 sizes available


LIFETIME @L70 B10 >102,000hrs	MAINS VOLTAGE 100-277VAC / 50-60 Hz
LUMINAIRE EFFICACY 180lm/W (at 4000K)	POWER FACTOR 0.97
CCT (SELECTABLE) 3000K/4000K/5000K	SURGE PROTECTION CM: 6kV, DM: 6kV
CRI <70	IP RATING IP66
BEAM ANGLE 90° x 60° (Tilt 30°)	IK RATING IK08
SALT SPRAY RATING 1000hrs	

PRODUCT VARIANTS

*Lumen output at 4000K CCT

	
SELECTABLE WATTAGES	LUMEN OUTPUT*
30W	5,310lm
40W	7,000lm
50W (Set)	9,000lm
CAD-50-7345-G-AW	

	
SELECTABLE WATTAGES	LUMEN OUTPUT*
60W	11,390lm
75W	13,716lm
90W (Set)	17,000lm
CAD-90-7345-G-AW	

	
SELECTABLE WATTAGES	LUMEN OUTPUT*
90W	15,756lm
110W	19,756lm
130W (Set)	23,275lm
CAD-130-7345-G-AW	

	
SELECTABLE WATTAGES	LUMEN OUTPUT*
120W	21,708lm
160W (Set)	29,163lm
200W	38,000lm
CAD-200-7345-G-AW	

MOUNTING ADAPTORS

POLE TOP ADAPTOR
CAD-PT-G

- Adaptor size Ø60mm
- Electroplated Steel powder coated in grey



POLE ADAPTOR
CAD-PA-G

- Includes 2X M12*180mm hexagon screws and nuts
- Suitable for D48-60mm pole
- Electroplated Steel powder coated in grey



WALL CORNER ADAPTOR
CAD-CM-G

- Includes 6X M10*50mm expansion screws/anchoring
- Electroplated Steel powder coated in grey





WALL PACK

LED WALL LIGHT



**CCT
SELECTABLE**



**>50,000hrs
LIFETIME**

**MOTION
SENSOR**

Option



IP65



5 YEAR WARRANTY



**2,891LM
OUTPUT**



IK10



100LM/W

LIFETIME @L70 B10 >50,000hrs

LUMINAIRE EFFICACY 100lm/W

CCT 4000K

CRI >80

SDCM <5

POWER 30W

MAINS VOLTAGE AC100-240V/50-60Hz

POWER FACTOR >0.95

THD <20%


IP RATING IP65

IK RATING IK10

PRODUCT VARIANTS

WATTAGES	LUMEN OUTPUT
30W	2,891lm
TYPE	Standard
DIMENSIONS	310.5mm x 264.9mm x 122mm
EVWP30CW	

WATTAGES	LUMEN OUTPUT
30W	2,891lm
TYPE	Includes microwave sensor
DIMENSIONS	310.5mm x 264.9mm x 122mm
EVWP30CW SNR	

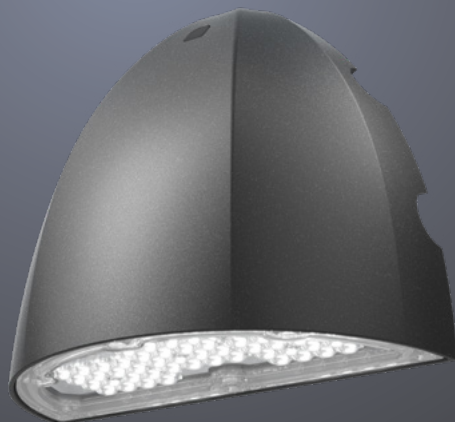

GUARD

PERIMETER LIGHT



135LM/W



Up to
**3,234LM
OUTPUT**

**DAYLIGHT
SENSOR**



IK10



CCT
Selectable



IP66

**DARK SKY
FRIENDLY**



**>60,000hrs
LIFETIME**



**5 YEAR
WARRANTY**

LIFETIME @L70 B10 >50,000hrs

LUMINAIRE EFFICACY 135lm/W

CCT (SELECTABLE) 3000K/4000K/5000K

CRI >80

SDCM <3

UP LIGHT 0%

CONTROL Photocell

MAINS VOLTAGE AC220-240V/50-60Hz

POWER FACTOR >0.90

THD <10%

IP RATING IP66

IK RATING IK10

PRODUCT VARIANTS

*Lumen output at 4000K CCT

WATTAGES

25W

LUMEN OUTPUT*

3,234lm

DIMENSIONS

212mm x 238mm x 138.5mm

GUARD-25-3CCT-B

WATTAGES

14W


LUMEN OUTPUT*

1,874lm

DIMENSIONS

212mm x 238mm x 138.5mm

GUARD-14-3CCT-B

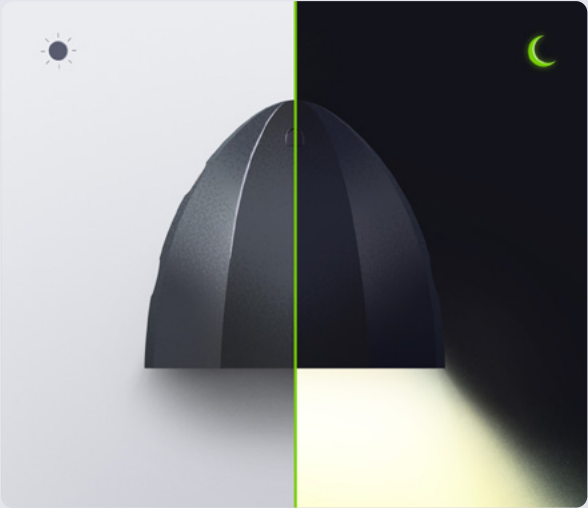



EVOLVE
LIGHTING

PRODUCTS

WHERE TO BUY



Apollo PRO

BY EVOLVE

The Apollo PRO has you covered with its innovative design and high performance.


DISCOVER

EXPLORE THE ENTIRE RANGE

DISCOVER MORE ONLINE OR REQUEST
A COPY OF THE EVOLVE CATALOGUE



GREAT SPACES REQUIRE GREAT FOUNDATIONS.

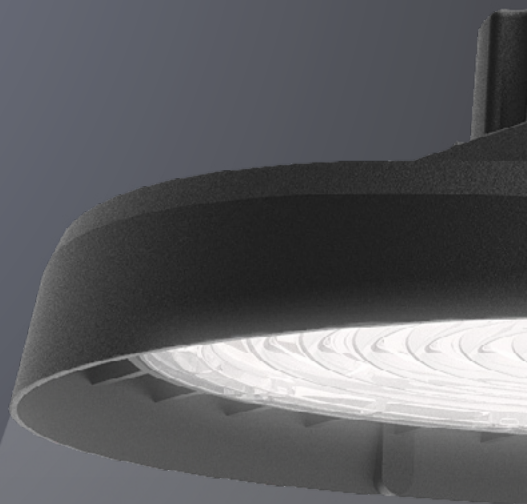

EVOLVE
LIGHTING



0800 357 6311

evolve-lighting.co.nz

Lighting Council NEW ZEALAND™
MEMBER